

BALACLAVA

CA 39672

BALACJAVA Malha FR, vestimenta de segurança confeccionado em tecido Malha, interlock 1852 FM, 100% algodão, ATPV 15,2 Cal/Cm² com gramatura nominal de 70 oz/yd²(240 g/m²)

Normas Técnicas:

ASTM F 1506-10a, ASTM 2621/2012, ASTM F 1959/F 1959M-12, ASTM D6413/6413M-13, ASTM F 1930-15

Laudos:

2016BR0343, 2016BR0344
2015US0026, 2015BR0025

Laboratório/AITEX

Laudos


K-418709-1408P08-R01

Laboratório/ KINETRICS


HIGH CURRENT LABORATORY

DADOS ETIQUETA

| | | |
|--|---|---|
|  | CA XXXX |  |
| ASTM F 1930 | 100% algodão | ASTM F 2421 |
|  |  |  |
| referência: | | |
| Enxágue normal - Não usar alvejante | | |
| Secagem em tambor rotativo - passar a 110° C | | |
| Limpeza a seco com percloroetileno | | |
| Empresa: | | |
| CNPJ: | | |
| Lote: | | |
| Data Fabricação: | | |
| Validade do EPI: | | |

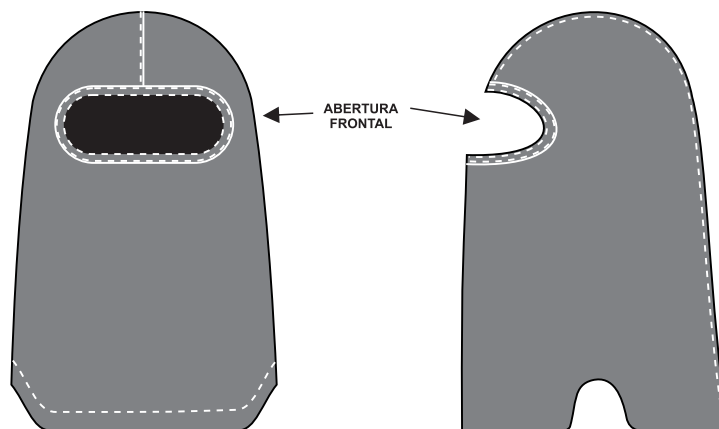

CINZA
1009

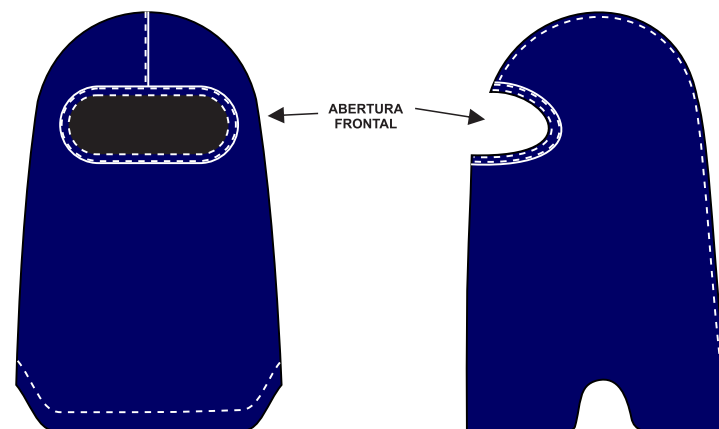

AZUL MARINHO
1018

Descrição:

- * BALACLAVA malha FR, antichama Risco 2.
- * Proteção do Cranio e Pescoço.
- * Aplicação de ATPVbordado ou etiqueta.
- * Confeccionado com costura dupla.
- * Linha 100% meta aramida antichamas.

CORES DISPONÍVEIS

